




**Steckkupplungs-Stecker BG2 Typ ST2...-S / Quick release coupling male type ST2...-S**  
Baugröße 2. Betriebsdruck: max. 270 bar / Size 2

Art. Nr.	Bezeichnung	D1	R1	G1
Art. N°	Description	(mm)		
288.310	ST2-IG G1/4"-S	17,3	-	IG G1/4"
288.311	ST2-IG G3/8"-S	17,3	-	IG G3/8"
288.312	ST2-IG M14x1,5-S	17,3	-	IG M14x1,5
288.313	ST2-IG M16x1,5-S	17,3	-	IG M16x1,5
288.320	ST2-06L-S	17,3	L06	M12x1,5
288.321	ST2-08L-S	17,3	L08	M14x1,5
288.322	ST2-10L-S	17,3	L10	M16x1,5
288.330	ST2-08S-S	17,3	S08	M16x1,5
288.331	ST2-10S-S	17,3	S10	M18x1,5
288.332	ST2-12S-S	17,3	S12	M20x1,5




**Steckkupplungs-Muffe BG2 Typ ST2...-M / Quick release coupling female type ST2...-M**  
Baugröße 2. Betriebsdruck: max. 270 bar / Size 2

Art. Nr.	Bezeichnung	R1	G1
Art. N°	Description		
288.210	ST2-IG G1/4"-M	-	IG G1/4"
288.211	ST2-IG G3/8"-M	-	IG G3/8"
288.212	ST2-IG M14x1,5-M	-	IG M14x1,5
288.213	ST2-IG M16x1,5-M	-	IG M16x1,5
288.220	ST2-06L-M	L06	M12x1,5
288.221	ST2-08L-M	L08	M14x1,5
288.222	ST2-10L-M	L10	M16x1,5
288.230	ST2-08S-M	S08	M16x1,5
288.231	ST2-10S-M	S10	M18x1,5
288.232	ST2-12S-M	S12	M20x1,5



**Steckkupplungs-Stecker BG2 Typ STS2...-S / Quick release coupling male type STS2...-S**  
Schottausführung, Baugröße 2. Betriebsdruck: max. 270 bar / Bulkhead, size 2

Art. Nr.	Bezeichnung	D1	R1	G1
Art. N°	Description	(mm)		
288.340	STS2-06L-S	17,3	L06	M12x1,5
288.341	STS2-08L-S	17,3	L08	M14x1,5
288.342	STS2-10L-S	17,3	L10	M16x1,5
288.350	STS2-08S-S	17,3	S08	M16x1,5
288.351	STS2-10S-S	17,3	S10	M18x1,5
288.352	STS2-12S-S	17,3	S12	M20x1,5

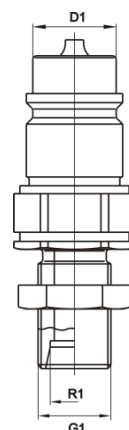

**Steckkupplungs-Muffe BG2 Typ STS2...-M / Quick release coupling female type STS2...-M**  
Schottausführung, Baugröße 2. Betriebsdruck: max. 270 bar / Bulkhead, size 2

Art. Nr.	Bezeichnung	R1	G1
Art. N°	Description		
288.240	STS2-06L-M	L06	M12x1,5
288.241	STS2-08L-M	L08	M14x1,5
288.242	STS2-10L-M	L10	M16x1,5
288.250	STS2-08S-M	S08	M16x1,5
288.251	STS2-10S-M	S10	M18x1,5
288.252	STS2-12S-M	S12	M20x1,5

