



<b>JIS - Pressarmatur Typ XPJ / JIS fitting type XPJ</b>						
Dichtkopf mit Innenkonus, metrische Überwurfmutter						
<i>Japanese connector. Sealing head with inside cone, metric union nut</i>						
Art. Nr.	Bezeichnung	Standard	DN	G1	S1	S2
Art. N°	Description					
209.001	XPJ 06/14	•	06	M14x1,5	19	17
209.008	XPJ 08/16	•	08	M16x1,5	22	17
209.009	XPJ 10/14		10	M14x1,5	19	17
209.007	XPJ 10/16		10	M16x1,5	22	17
209.002	XPJ 10/18	•	10	M18x1,5	24	19
209.003	XPJ 12/22	•	12	M22x1,5	27	22
209.004	XPJ 12/24		12	M24x1,5	30	27
209.005	XPJ 16/24	•	16	M24x1,5	30	27
209.006	XPJ 20/30	•	20	M30x1,5	36	30
209.011	XPJ 25/33	•	25	M33x1,5	41	36
209.012	XPJ 32/36	•	32	M36x1,5	46	46
209.013	XPJ 40/42	•	40	M42x1,5	50	50

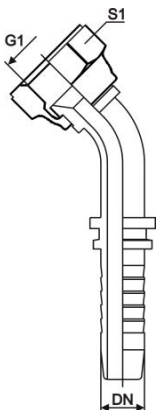


<b>45° JIS - Pressarmatur Typ XPKJ ../4 / JIS 45° fitting type XPKJ ../4</b>					
Dichtkopf mit Innenkonus, metrische Überwurfmutter					
<i>Japanese connector. Sealing head with inside cone, metric union nut</i>					
Art. Nr.	Bezeichnung	Standard	DN	G1	S1
Art. N°	Description				
209.035	XPKJ 06/14/4	•	06	M14x1,5	19
209.036	XPKJ 08/16/4	•	08	M16x1,5	22
209.037	XPKJ 10/14/4		10	M14x1,5	19
209.039	XPKJ 10/18/4	•	10	M18x1,5	24
209.040	XPKJ 12/22/4	•	12	M22x1,5	27
209.042	XPKJ 16/24/4	•	16	M24x1,5	30
209.043	XPKJ 20/30/4	•	20	M30x1,5	36
209.044	XPKJ 25/33/4	•	25	M33x1,5	41


<b>90° JIS - Pressarmatur Typ XPKJ ../9 / JIS 90° fitting type XPKJ ../9</b>					
Dichtkopf mit Innenkonus, metrische Überwurfmutter					
Japanese connector. Sealing head with inside cone, metric union nut					
Art. Nr.	Bezeichnung	Standard	DN	G1	S1
Art. N°	Description				
209.050	XPKJ 06/14/9	•	06	M14x1,5	19
209.051	XPKJ 08/16/9	•	08	M16x1,5	22
209.052	XPKJ 10/14/9		10	M14x1,5	19
209.053	XPKJ 10/18/9	•	10	M18x1,5	24
209.054	XPKJ 12/22/9	•	12	M22x1,5	27
209.057	XPKJ 16/24/9	•	16	M24x1,5	30
209.058	XPKJ 20/30/9	•	20	M30x1,5	36
209.059	XPKJ 25/33/9	•	25	M33x1,5	41

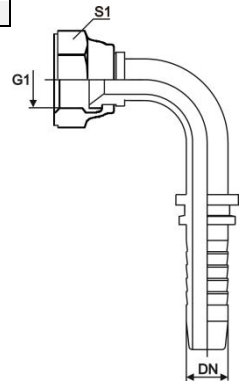

**Standard** Standardgröße / Standard size  
**DN** Durchmesser Nominal / Diameter nominal  
**G1** Gewinde / Thread  
**S1** Schlüsselweite / Hexagon  
**S2** Schlüsselweite / Hexagon




<b>DKZI - Pressarmatur Typ XPDZI / DKZI fitting type XPDZI</b>						
Dichtkopf mit Innenkonus, BSP-Überwurfmutter <i>Japanese connector. Sealing head with inside cone, BSP union nut</i>						
Art. Nr.	Bezeichnung	Standard	DN	G1	S1	S2
Art. N°	Description					
213.201	XPDZI 06 1/4"	•	06	1/4"	19	17
213.202	XPDZI 06 3/8"		06	3/8"	22	19
213.205	XPDZI 10 3/8"	•	10	3/8"	22	19
213.207	XPDZI 12 1/2"	•	12	1/2"	27	22
213.208	XPDZI 20 3/4"	•	20	3/4"	32	30
213.210	XPDZI 25 1"	•	25	1"	38	36
213.212	XPDZI 32 1.1/4"	•	32	1.1/4"	50	46
213.215	XPDZI 40 1.1/2"	•	40	1.1/2"	55	50

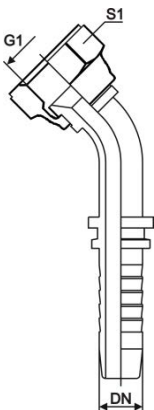

<b>45° DKZI - Pressarmatur Typ XPKZI ../4 / 45° DKZI fitting type XPKZI ../4</b>					
Dichtkopf mit Innenkonus, BSP-Überwurfmutter/ <i>Japanese connector. Sealing head with inside cone, BSP union nut</i>					
Art. Nr.	Bezeichnung	Standard	DN	G1	S1
Art. N°	Description				
213.250	XPKZI 06 1/4"/4	•	06	1/4"	19
213.253	XPKZI 10 3/8"/4	•	10	3/8"	22
213.254	XPKZI 12 1/2"/4	•	12	1/2"	27
213.255	XPKZI 20 3/4"/4	•	20	3/4"	32
213.256	XPKZI 25 1"/4	•	25	1"	38
213.257	XPKZI 32 1.1/4"/4	•	32	1.1/4"	50
213.258	XPKZI 40 1.1/2"/4	•	40	1.1/2"	55

<b>90° DKZI - Pressarmatur Typ XPKZI ../9</b> / 90° DKZI fitting type XPKZI ../9					
Dichtkopf mit Innenkonus, BSP-Überwurfmutter Japanese connector. Sealing head with inside cone, BSP union nut					
Art. Nr.	Bezeichnung	Standard	DN	G1	S1
Art. N°	Description				
213.231	XPKZI 06 1/4"/9	•	06	1/4"	19
213.234	XPKZI 10 3/8"/9	•	10	3/8"	22
213.235	XPKZI 12 1/2"/9	•	12	1/2"	27
213.236	XPKZI 20 3/4"/9	•	20	3/4"	32
213.237	XPKZI 25 1"/9	•	25	1"	38
213.238	XPKZI 32 1.1/4"/9	•	32	1.1/4"	50
213.239	XPKZI 40 1.1/2"/9	•	40	1.1/2"	55

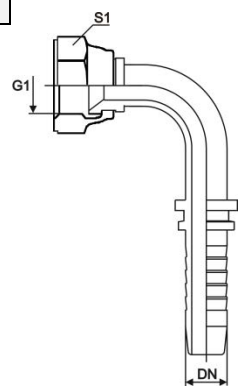

**Standard** Standardgröße / Standard size  
**DN** Durchmesser Nominal / Diameter nominal  
**G1** Gewinde / Thread  
**S1** Schlüsselweite / Hexagon  
**S2** Schlüsselweite / Hexagon